

SALVARANI

Computer per atomizzatori
Computers for Air blasters



TeeJet 844-AB monitor di controllo elettronico progettato in modo particolare ed esclusivo per l'applicazione in frutteti e vigneti. Il software della regolazione si adatta a diverse tipologie di impianti e per regolazioni basate sia sulla portata che sulla pressione. Novità software per gestione atomizzatori con barre scavallanti

TeeJet 844-AB electronic control especially designed for application in orchards and vineyards. The software of the regulation is suitable for different types of equipments and regulations based on flow and pressure. New software for airblasters with high-clearance spray booms.



Nuovo Computer Salvarani srl serie 76-AB con scheda di controllo interna TeeJet®. Dalla collaborazione TeeJet e Salvarani nasce questo nuovo dispositivo proporzionale all'avanzamento. Il computer 76-AB da abbinare ad atomizzatori, utilizza la pressione come segnale di riferimento. Il display visualizza sempre due indici, uno stabile e il secondo a richiesta dell' operatore.

Salvarani company introduces New Computer serie 76-AB with internal TeeJet® control plate. From TeeJet® experience of model 834 and from a customized version made by Salvarani, a new controller for the proportional distribution based on pressure is born. This new computer applies on orchards and air blasters. Two Index on the display, one is fixed, the other one on operator demand.

DAVIS

Davis WeatherLink IP




WeatherLinkIP permette ai possessori di una stazione Davis Vantage Pro e Pro2 di pubblicare i dati meteorologici direttamente su Internet senza l'utilizzo del PC. Il pacchetto WeatherLinkIP include il software Davis WeatherLink, una versione speciale del data logger da collegare a tutti i modelli delle consolle Vantage Pro/Pro2 (e Weather Envoy) e al router ADSL.

WeatherLinkIP for Vantage Pro®, Vantage Pro2™, or Weather Envoy™. Post your weather data directly to the Internet without a PC—WeatherLinkIP does all the work for you. Simply plug the data logger into the back of your console or Weather Envoy and connect the cable to your cable/DSL router. Within minutes, you'll be able to see your weather data live on the Internet.

SALVARANI

Agrishow 2008

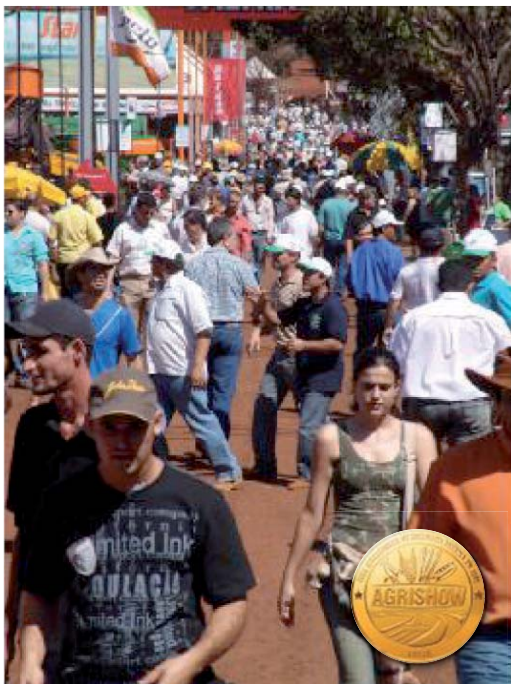

San Paolo del Brasile, dal 28 aprile al 3 maggio 2008

Sao Paulo, Brazil, april 28 - may 3 2008

SHURFLO

Pompa sommersa
Submergible pump



Pompa 24 Volts sommersa.
Portata max 443 Lt/ora con mandata verticale 6 Mt.
Portata minima 310 Lt/ora con mandata verticale 70 Mt
Abbinabile a pannelli solari.

Utilizzo indicato in sistemi di irrigazione, trasferimento acqua, giardini, pozzi, aziende agricole e comunque in tutte quelle zone non servite da corrente elettrica tipo montagna e zone desertiche

9300 series long-life 24 VDC operation, the solution to your remote water pumping needs. This pump is rugged, durable and built to last. The 9300 delivers a steady 112 GPH (422 LPH) at its maximum depth of 230 feet (70M) when supplied with 24 VDC. Its unique water-tight power connector stops water wicking and prevents potential condensation problems.


Great for livestock watering, irrigation, pond aeration, remote homes, cabins and all sort of applications when you don't have electricity.

- 443 LPH maximum flow rate with 6 Mt depth
- 310 LPH minimum flow rate with 70 Mt depth
- Runs dry without damage
- Corrosion-proof housing with stainless-steel fasteners
- Runs dry without damage
- 50 mesh stainless steel inlet screen
- suitable to work with solar panels.



COMPONENTI / COMPONENTS

Interruttori e pulsanti APEM
APEM push buttons and lever switches

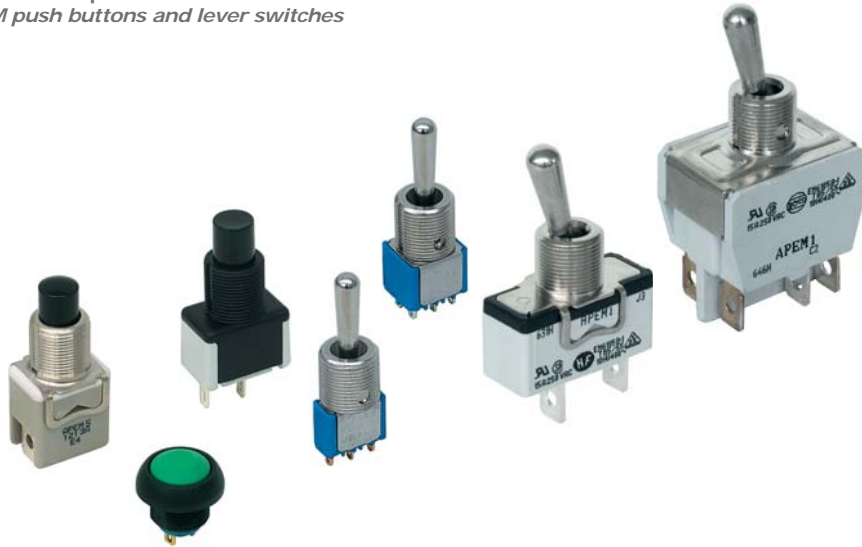

Interruttori APEM, ideali per il montaggio a pannello. Disponibili sia in versione con fast-on che con connettori a saldare per circuito stampato.

Come accessori opzionali di montaggio sono disponibili cappucci in silicone, distanziali e portaLED.

APEM switches, suitable for panel mount. Available in versions with 6.3mm faston or with solder contacts.

Available fitting optional: silicone hoods, spacers and LED supports.

DAVIS

Stazione Bagnatura / Temperatura / Umidità
Leaf and Soil Moisture / Temperature Station



Stazione ad energia solare, include trasmettitore e batteria all'interno di un box resistente agli agenti atmosferici. Per la visualizzazione dei dati è necessaria una console/ricevitore Vantage Pro2 senza fili oppure Weather Envoy wireless con WeatherLink.

Solar-powered station includes transmitter and backup battery inside weather-resistant shelter. To view the data, add a wireless Vantage Pro2 console/receiver, or Weather Envoy and WeatherLink.

FIERE / TRADE FAIRS

TECH AGRO 2008



6. - 10. 4. 2008, Brno - Exhibition Centre
International Fair of Agricultural Technology

Brno, Repubblica Ceca, dal 6 al 10 aprile 2008
Brno, Czech Republic, from april 6 to 10 2008

TEEJET

BoomPilot



senza BoomPilot
without BoomPilot



con BoomPilot
with BoomPilot

BoomPilot è l'ideale complemento ad ogni sistema GPS con barra di guida.

Attraverso i dati forniti dal vostro sistema GPS, BoomPilot è in grado di controllare le singole sezioni di barra ed evitare le applicazioni delle zone già trattate.

Boompilot is a quick and easy addition to almost any lightbar guidance system.

With the GPS data provided by your existing system, BoomPilot will automatically switch off sprayer boom sections when they enter a previously applied area.

TeeJet®